


Tabelle Schutzrohrgrösse

Typ:	Dim. Aussen	Dim. Schutzrohr, I-I
H-25	75 mm	135 mm
H-32	75 mm	135 mm
H-40	90 mm	150 mm
H-50	110 mm	170 mm
H-63	125 mm	185 mm
H-75	140 mm	200 mm
H-90	160 mm	220 mm
H-110	180 mm	240 mm
H-25+25	90 mm	150 mm
H-32+32	110 mm	170 mm
H-40+40	125 mm	185 mm
H-50+50	160 mm	220 mm
H-63+63	180 mm	240 mm

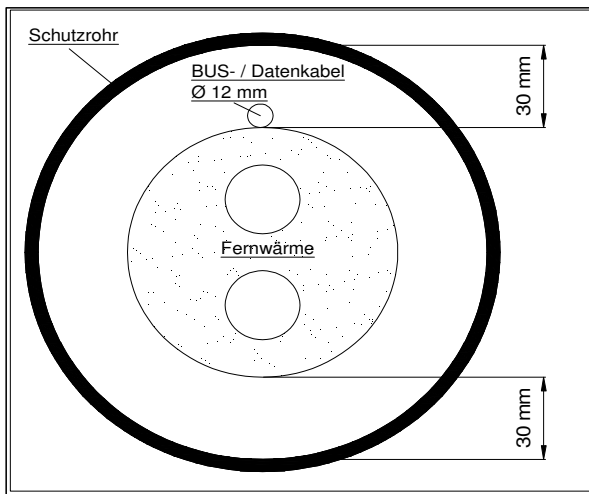

max. Biegeradius Schutzrohr = 2.00 m / keine Formstücke zulässig !!!

Abbildung: Einzug mit Kabelzugstrumpf und Datenkabel

